


SPRAY TEST 36



STANDARD SPRAY TEST RATINGS

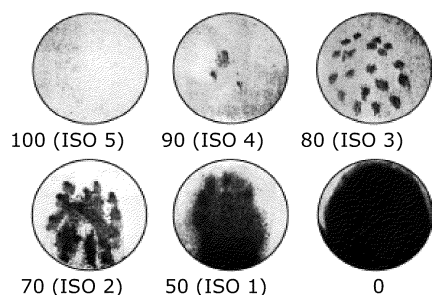

100-NO STICKING OR WETTING OF THE SPECIMEN FACE
 90-SLIGHT RANDOM STICKING OR WETTING FOF THE SPECIMEN FACE
 80-WETTING OF SPECIMEN FACE AT SPRAY POINTS
 70-PARTIAL WETTING OF THE SPECIMEN FACE BEYOND THE SPRAY POINTS
 50-COMPLETE WETTING OF THE ENTIRE SPECIMEN FACE BEYOND THE SPRAY POINTS
 0- COMPLETE WETTING OF THE ENTIRE FACE OF THE SPECIMEN

OVERVIEW

SPRAY TEST 36 performs **water repellency** tests on fabrics measuring the **resistance** of a fabric **to wetting**, which gets in contact with the **face** of end product, in form of rain.

Metal spray nozzles, with **19 holes** having standard diameter in compliance with the standard.

Glass funnel, with a predetermined diameter.


Specimen holder, placed at an angle of 45° so that the centre of the specimen is at a specific distance below the spray nozzle.

Graduated cylinder, 250 mL, class B.

TECHNICAL DATA

Reference Standard:	UNI 4920: 2013 AATCC Test Method 22: 2014
Dimensions:	35 x 35 x 55 mm
Net weight:	2 Kg

FYI: E-commerce service for spare parts on website www.brancaidealair.it



S.T.A. BRANCA IDEALAIR

di Branca Barbara & C. S.a.s.

21020 MERCALLO Via Torino, 583/6 VARESE ITALY Tel.0331 968.333-130 Fax 0331 968281
 E-mail info@brancaidealair.it Web: www.brancaidealair.it